



GLORIA 22^{ELECTRIC}



**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel $\varnothing$ 30 mm.
- Horizontal heating elements in painted mild steel $\varnothing$ 22 mm.
- Heat transfer fluid.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

ELECTRICAL ONLY:

- ☒ With WiFi digital thermostat
- ☒ With PLUS digital thermostat
- ☒ With ECO digital thermostat

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire lenght: 1200 mm with Schuko plug (with WiFi or ECO digital thermostat)

Wire lenght: 800 mm with Schuko plug (with PLUS digital thermostat)

Power supply: 230Vac 50Hz (with WiFi or PLUS digital thermostat)

Power supply: 230Vac 50/60Hz (with ECO digital thermostat)


Seasonal energy efficiency η_s : 39% (with WiFi digital thermostat)

Seasonal energy efficiency η_s : 38% (with PLUS or ECO digital thermostat)

CERTIFICATES



HOW TO PLACE ELECTRIC RADIATORS

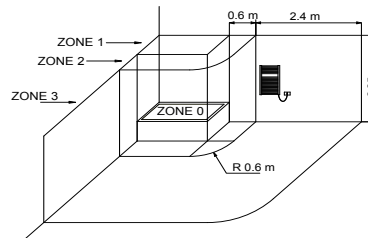

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.









All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

INCLUDED




**Remote control of PLUS
digital chrono-thermostat**

Remote control of PLUS
digital chrono-thermostat
functioning

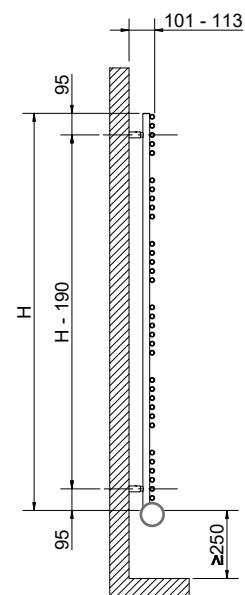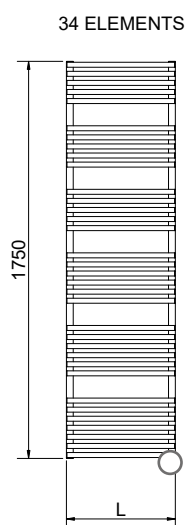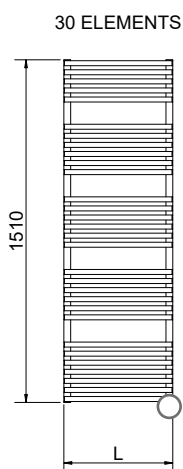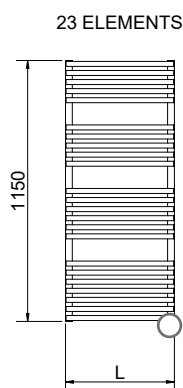

(*) Pipe center (l) measure of the fixing kit

○ The general footprint has to be calculated considering the thermostat height




GLORIA 22 ELECTRIC WIFI

NEW


Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
790	430	400	3581666100036	400	10
1150	580	550	3581666100037	700	17
1500	580	550	3581666100038	900	22
1750	580	550	3581666100039	1200	25

PRODUCT AVAILABLE FROM APRIL 2022



GLORIA 22 ELECTRIC PLUS (remote control included)

Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
790	430	400	3581666100040	400	10
1150	580	550	3581666100041	700	17
1500	580	550	3581666100042	900	22
1750	580	550	3581666100043	1200	25



GLORIA 22 ELECTRIC ECO

Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
790	430	400	3581666100011	400	10
1150	580	550	3581666100012	700	17
1500	580	550	3581666100013	900	22
1750	580	550	3581666100014	1200	25

Art. nr. are referred to colour WHITE R01

ARDESIA®

TOWEL RAILS

ELECTRIC

STAINLESS STEEL

RADIATORS

VENTILATION
RADIATORS

MY WAY®
ACCESSORIES AND
TECHNICAL SUPPORT